



Thank you for selecting Xtricity as your lighting choice for your home. With proper care, this product will provide years of pleasure and enjoyment. Carefully follow the instructions in order to ensure that this product functions safely and properly for years to come.

PIR SENSOR FOR HIGH BAY LIGHT



INTRODUCTION

This product provides multi-level control based on motion and/or daylight contribution. It controls 0-10 VDC LED drivers or dimming ballasts, and is rated for wet and cold locations. All control parameters are adjustable via a wireless configuration tool capable of storing.

SPECIFICATIONS

Power supply	12V-24V DC, >30mA
Dim control output	0-10V, max. 25mA sinking current
Remote range	50ft. (15m) indoor, no backlight
Dim control output	0-10V
Detection radius	20% / 50% / 75% / 100%(1-8m)
Mounting height	Max 50ft.(15 meters)
Time setting	10s/1 min/5min/10min/15min/20min/30min/60min
Light-control	24H/10LUX/30LUX/50LUX
Temperature	-4°F ~+ 140° F (-20° C~+60° C)
IP rating	IP65

WARNING


NOTE: Warm up time is 40 seconds. After the sensor connects input power first time, the light will keep on 40seconds, then go to dimming to work normally.

NOTE: Factory Default Setting: 100% sensitivity, Hold on time: 5min, Daylight sensor is-Q-, Dimming level: 30%,Dimming time: 60minutues.


NOTE: Any setting changed by remote control, the led light that sensor connect will on/off as confirm.

CORRIDOR FUNCTION


This function inside the motion sensor to achieve tri-level control, for some areas which require a light change notice before switch-off. The sensor offers 3 levels of light: 100%-->dimmed light (natural light is insufficient) -->off: and 2 periods of selectable waiting time: motion hold-time and stand-by period: Selectable daylight threshold and freedom of detection area.



With sufficient natural light, the light does not switch on when presence is detected.



With insufficient natural light, the sensor switches on the light automatically when presence is detected.



After hold-time, the light dims to stand-by level if the surrounding natural light is below the daylight threshold.




Light switches off automatically after the stand-by period elapses.

DAYLIGHT SENSOR FUNCTION


Open the daylight sensor by pushing  when remote control is in setting condition.



The light switches on at 100% when there is movement detected.




The light dims to stand-by level after the hold-time.







The light remains in dimming level at night.

Settings on this demonstration:
Hold-time: 30min
Setpoint on:50lux
Setpoint off:300lux
Stand-by Dim: 10%
Stand-by period: +∞
(when the smart photocell sensor open, the stand-by time is only +∞)

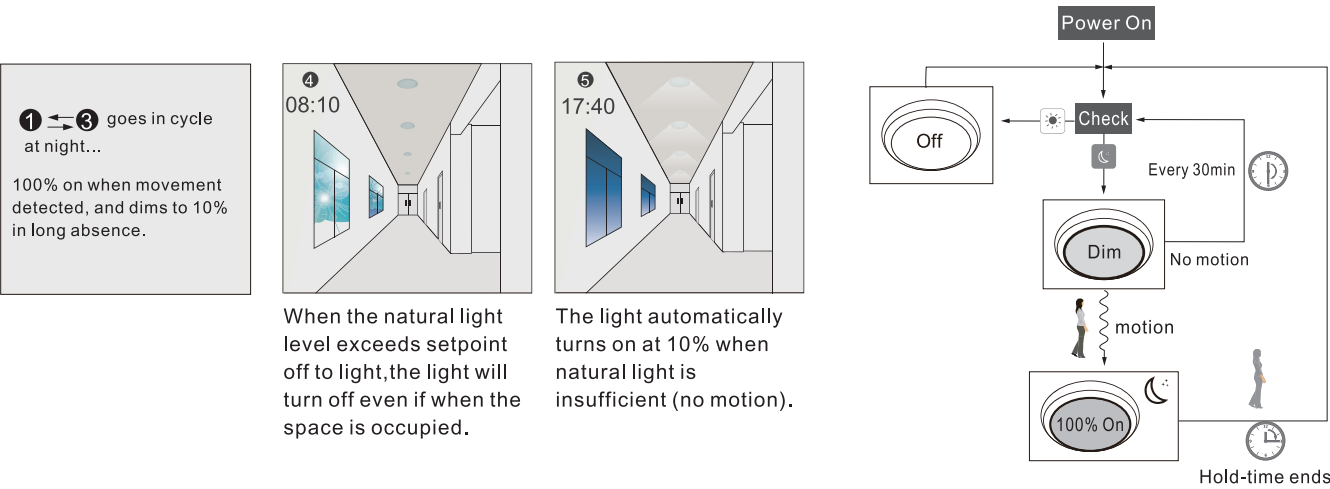

SENSOR COVERAGE

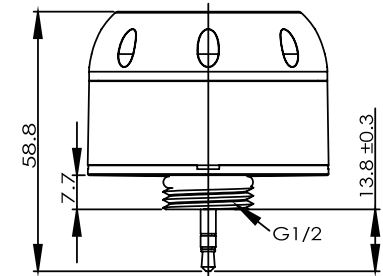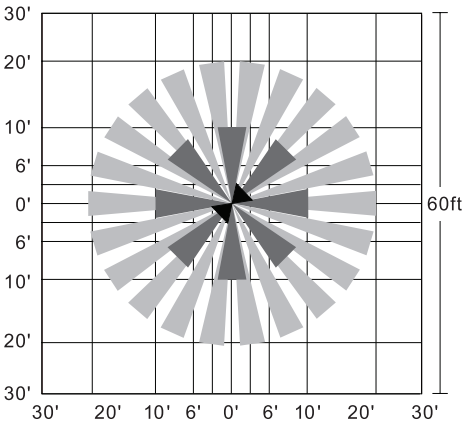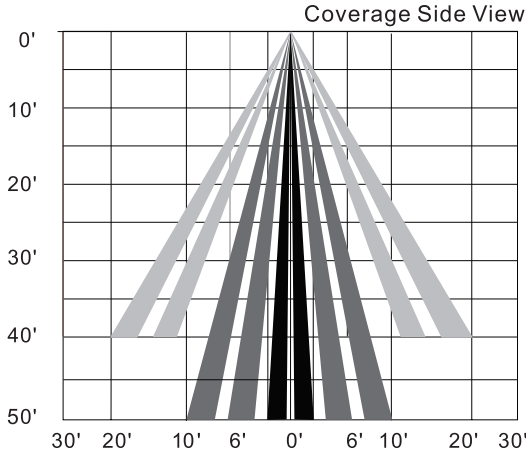

The sensor installation position



High bay fixture