


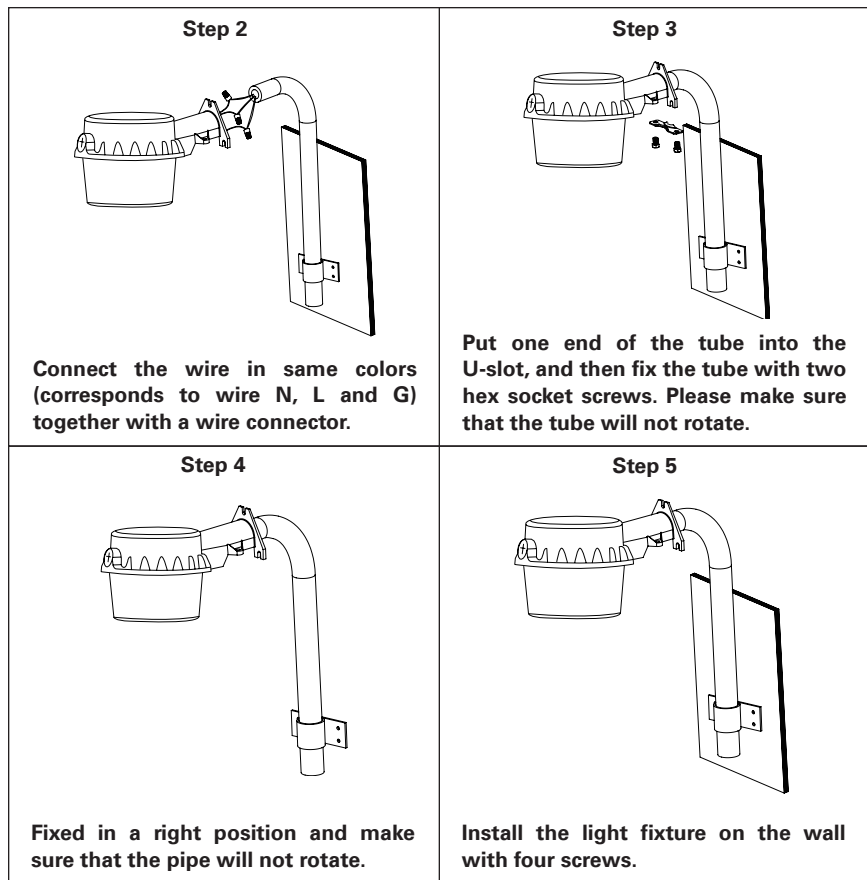

After installation, please

- check whether the photocell is firmly fixed (skip it if not equip the sensor).
- check whether the lighting fixture is firmly fixed.
- check whether wires are connected correctly.

	LUX	PHOTOCELL	FIXTURE
DUSK	< 60 LUX 60-120 LUX	ACTIVATES NO ACTION	ON ON
DAWN	> 120 LUX 120-60 LUX	ACTIVATES NO ACTION	OFF OFF

INSTRUCTIONS

35W LED OUTDOOR SECURITY LIGHT - MOUNTING ARM SOLD SEPARATELY



1. INTRODUCTION

- This LED outdoor security light uses the latest in solid state lighting technology for long life, low maintenance, and high efficiency.
- Same as the traditional HID lighting, a standard photocell could be mounted on the top (ANSI C136.10), to make it completely suitable for street lighting.
- An internal power-factor-corrected switch-mode supply allows it to be used from any nominal 100V-277V, 60Hz AC supply without any variation in light output.
- Suitable for use in the following locations:
 1. Ambient Temp: -20c° ~ +50c°
 2. Wet Locations IP65

Note : Save these instructions for future reference.

For item 4-80034

2. INSTALLATION

Warning:

To avoid the risk of fire, explosion, or electric shock, this product should be installed, inspected, and maintained by a qualified electrician only, in accordance with all applicable electrical codes.

Warning:

To avoid electric shock:

- Be certain electrical power is OFF before and during installation and maintenance.
- Fixture must be connected to a wiring system with an equipment grounding conductor.

Warning:

To avoid an explosion:



- Make sure the supply voltage is the same as the rated luminaire voltage.
- Do not install where the marked operating temperatures exceed the ignition temperature of the hazardous atmosphere.
- Do not operate in ambient temperatures above those indicated on the Fixture nameplate.
- Keep lens tightly closed when in operation.

For supply connections use wire rated for at least 100°C

INSTALLATION STEPS :

Refer to the following diagram when you install the fixture. Two installation methods, directly fix to the mounting surface or fix to the mounting surface with an arm.

1. Directly fix to mounting surface

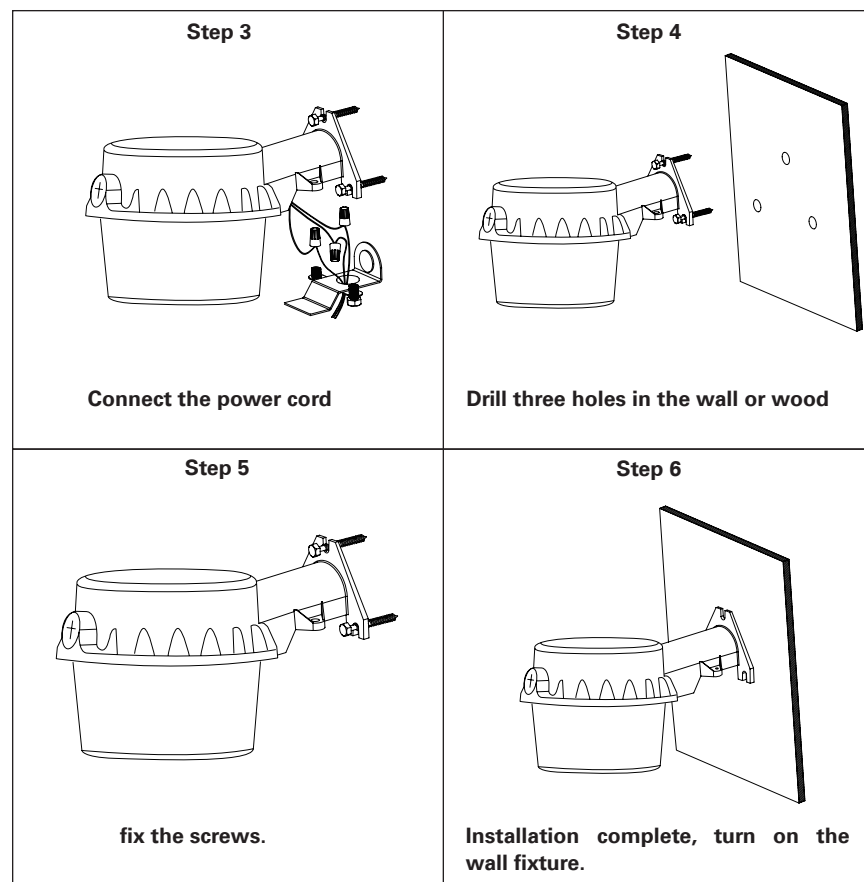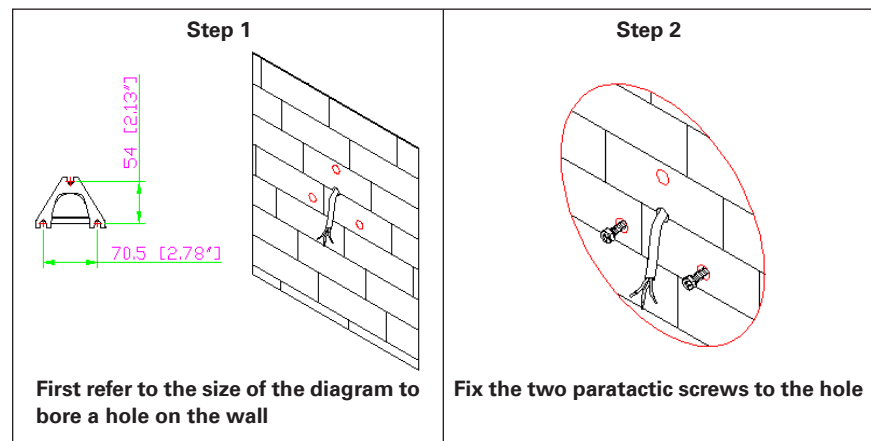

2. Fix to mounting surface with an arm (MOUNTING ARM SOLD SEPARATELY)

